



description

Push-in one piece insert giving a smooth exit from conduit and protecting against cable abrasion when fittings are not used.

specifications

Material: polyacetal (POM)
Colour: black

Operating temperature range:

Static Applications -40 to 120°C

Dynamic:


Continuous -5 to 120°C

Short Term -5 to 150°C

approvals

Complies with End of Life Vehicle (ELV) directive EU 2000/53/EC

conduit end caps dimensions

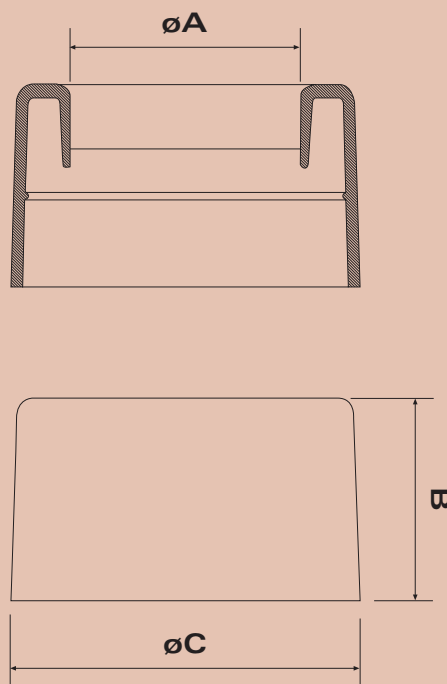

nominal dimensions

Part No	conduit size	A	B	C
CES12	NC12	8	15	16
CES16	NC16	9.5	15	18
CES20	NC20	13.5	18	25
CES28	NC28	20.5	20	32
CES32	NC32	25.7	20	38
CES40	NC40	32.3	25	46
CES50	NC50	43.7	25	58

note: dimensions are in mm

